

HUAWEI IdeaHub

New Style, Smart Office

IdeaHub Pro 65" 86"






HUAWEI IdeaHub Overview

Incorporating intelligent handwriting recognition, UHD projection, video conferencing and open office applications, HUAWEI IdeaHub series is your new option for smart office in meeting room, open office area, executive room, home office and many other scenarios.



Various Application Scenarios

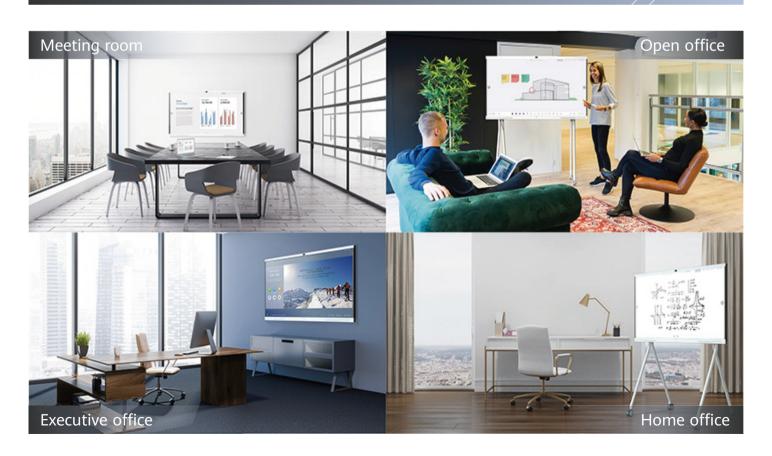

Product Highlights



Elegant Simplicity

- Modern user-centric design
- Gentle jade white frame
- Slender artistic stand

4K UHD Projection for Better User Experience

- Up to 4K resolution for smoother projection
- Higher-definition images and 4K H.265
- More accurate mouse-pointing and ultra-low cursor latency





Superb Interactive Whiteboard with Ultra-low Latency

- Ultra-low writing latency and smooth writing experience
- Intelligent writing recognition, automatically converting handwriting into digital forms
- One tap to send minutes to your mailbox for higher efficiency

Cloud Meeting Support, Easy to Use

- Support 3rd party cloud meeting service (OPS module required)
- Built-in HUAWEI CLOUD Meeting, hard codec, and one-click activation
- Seamless collaboration between PCs, phones, and IdeaHubs, allowing scanning to join a meeting (HUAWEI CLOUD Meeting)
- High network adaptability, 30% PLC for video, and 80% PLC for audio
- Cross-enterprise communication, virtual meeting rooms, supporting one-click to invite sites (HUAWEI CLOUD Meeting)



Product Highlights



Native 4K & AI for Better Meeting Experience

- H.265 HD video and 4K content sharing
- Flexible layout with SVC multistream
- Auto-Framing
- Speaker tracking: automatically tracks the speaker and displays the close-up shot

Open Ecosystem, Enormous Apps

- Popular apps pre-installed and customizable homepage
- Private application portal and web app distribution







Bulletin Board

- Company culture demonstration
- Real-time release of the company internal information in the bulletin
- Hierarchical content management for customization based on scenarios

Open Software and Hardware for Industry Applications

- Windows platform extension, OPS: optional extension module for Windows
- Open SDK: allows 3rd-party to use hardware and audiovisual capability



Technical Specifications

Model IdeaH⊍D Fro Screen size 65" 86" Components Main body Codec, camera, microphone array, and speaker Stylus pen 2 Wall-mounted bracket √(optional) √(optional) Rolling stand √(optional) √(optional) Cables Network cables and power cables Touch (tablet) √(optional) √(optional) Geasth of East Rey √(optional) √(optional) System CPU Dual-chip 4-core@1.5 GHz 4-core@1.8 GHz RAM 12 GB Flash 64 GB AL Al computing power 4T FLOPS Screen Backlighting type E-LED D-LED Resolution 4K AK Refresh rate 60 Hz Precision Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Adaptive brightness √ Camera Resolution 4 K30<	Technical Specificatio	ns−1		
Main body Codec, camera, microphone array, and speaker Stylus pen Vall-mounted bracket Voloptional) Voloptio				
Main body Stylus pen 2 Wall-mounted bracket N(optional) Network cables and power cables Touch (tablet) Network cables and power cables Network cables Network cables and power cables Network cables	Screen size	65" 86"		
Stylus pen 2 √(optional) √(included) Rolling stand √(optional) √(optional) √(optional) Cables Network cables and power cables Network cables and power cables √(optional) √(optional) √(optional) √(optional) √(optional) √(optional) √(optional) √(optional) √(optional) ✓(optional) ✓(optional) <td>Components</td> <td></td>	Components			
Wall-mounted bracket √(optional) √(included) Rolling stand √(optional) √(optional) Cables Network cables and power cables Touch (tablet) √(optional) √(optional) IdeaShare Key √(optional) √(optional) System CPU Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz RAM 12 GB Flash 64 GB Al computing power 4T FLOPS Screen Secent Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ √ Adaptive brightness √ ✓ Camera Resolution 4K30 Auto-Framing √ ✓ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digistal zoom Secure and anti-flicker	Main body	Codec, camera, microphone array, and speaker		
Rolling stand √(optional) √(optional) Cables Network cables and power cables Touch (tablet) √(optional) √(optional) IdeaShare Key √(optional) √(optional) System CPU Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz RAM 12 GB Flash 64 GB Al computing power 4T FLOPS Screen Backlighting type E-LED D-LED Resolution 4K Resolution Refresh rate 60 Hz Precision Precision ± 1 mm Multi-touch Anti-reflection and glare √ √ Adaptive brightness √ ✓ Camera Resolution 4K30 Auto-real Auto voice tracking √ √ Auto-Framing √ √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom 2 Speakers	Stylus pen	2		
Cables Network cables and power cables Touch (tablet) √(optional) √(optional) IdeaShare Key √(optional) √(optional) System Voptional √(optional) CPU Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz RAM 12 GB Flash 64 GB Al computing power 4T FLOPS Screen OP-LED Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker √ Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup distance 8 m Sound pickup distance 8 m Sound pickup domain 100 Hz to 20 kHz Quantity 12 Frequency domain 100 Hz to 20 kHz	Wall-mounted bracket	√(optional) √(included)		
Touch (tablet) √(optional) √(optional) IdeaShare Key √(optional) System CPU Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz RAM 12 GB Flash 64 GB Al computing power 4 TFLOPS Secret Backlighting type E-LED D-LED Resolution 4 K Refersh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ Anti-reflection and glare √ Anti-reflection and glare √ Auti-reflection and glare Auti-reflection and glare <th colspa<="" td=""><td>Rolling stand</td><td>√(optional) √(optional)</td></th>	<td>Rolling stand</td> <td>√(optional) √(optional)</td>	Rolling stand	√(optional) √(optional)	
IdeaShare Key J((optional)	Cables	Network cables and power cables		
System CPU Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz RAM 12 GB Flash 64 GB Al computing power 4T FLOPS Screen Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision 1 1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speaker Frequency domain 100 Hz to 20 kHz Microphones Sound pickup angle 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Touch (tablet)	√(optional) √(optional)		
CPU Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz RAM 12 GB Flash 64 GB Al computing power 4T FLOPS Screen Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker √ Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup angle 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20	IdeaShare Key	√(optional)		
RAM 12 GB Flash 64 GB Al computing power 4T FLOPS Screen Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ±1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-ficker 2com 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Nultiy Groward Microphones Sound pickup angle 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	System			
Flash 64 GB Al computing power 4T FLOPS Screen Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ±1 mm Multi-touch 20 points Anti-reflection and glare Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-ficker Zoom 2 x digital zoom Speakes Frequency domain 100 Hz to 20 kHz Microphones Sound pickup distance Sound pickup angle 180° forward Quantity Frequency domain 12 Frequency domain 100 Hz to 20 kHz Quantity 12 Frequency domain 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	CPU	Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz		
Screen Backlighting type	RAM	12 GB		
Screen Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera 8csolution Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker √ Zoom 2 x digital zoom Speakers Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Flash	64 GB		
Screen Backlighting type E-LED D-LED Resolution 4K Refresh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker √ Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Al computing power			
Resolution 4K Refresh rate 60 Hz Precision ±1 mm Multi-touch 20 points Anti-reflection and glare Adaptive brightness Camera Resolution 4K30 Auto voice tracking Auto-Framing Ultra-wide angle 880° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Sound pickup angle 8 m Sound pickup angle 8 m Sound pickup angle 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Screen			
Refresh rate 60 Hz Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup angle 8 m Sound pickup angle 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Backlighting type	E-LED D-LED		
Precision ± 1 mm Multi-touch 20 points Anti-reflection and glare Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup angle 8 m Sound pickup angle 8 m Sound pickup angle 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Resolution	4K		
Multi-touch 20 points Anti-reflection and glare √ Adaptive brightness √ Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker √ Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Refresh rate			
Anti-reflection and glare Adaptive brightness Camera Resolution Auto voice tracking Auto-Framing Ultra-wide angle Anti-fog, dust-proof, and anti-flicker Zoom Speakers Frequency domain Quantity Stereo audio Microphones Sound pickup distance Sound pickup angle Anti-fectory and angle 8 m Sound pickup angle 180° forward 8 m Sound pickup angle 180° forward 100 Hz to 20 kHz	Precision			
Anti-reflection and glare Adaptive brightness Camera Resolution Auto voice tracking Auto-Framing Vltra-wide angle Anti-fog, dust-proof, and anti-flicker Zoom Speakers Frequency domain Quantity Stereo audio Microphones Sound pickup distance Sound pickup angle Sound Page Page Page Page Page Page Page Page	Multi-touch			
Camera Resolution 4K30 Auto voice tracking √ Auto-Framing √ Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker √ Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Anti-reflection and glare	-		
Resolution 4K30 Auto voice tracking Auto-Framing Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Adaptive brightness			
Auto voice tracking Auto-Framing Ultra-wide angle Anti-fog, dust-proof, and anti-flicker Zoom Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio Microphones Sound pickup distance Sound pickup angle Quantity 12 Frequency domain	Camera			
Auto-Framing Ultra-wide angle Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio Microphones Sound pickup distance Sound pickup angle Quantity 12 Frequency domain 100 Hz to 20 kHz	Resolution	4K30		
Ultra-wide angle 80° Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Auto voice tracking	\checkmark		
Anti-fog, dust-proof, and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Auto-Framing			
and anti-flicker Zoom 2 x digital zoom Speakers Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio √ Microphones Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Ultra-wide angle			
SpeakersFrequency domain100 Hz to 20 kHzQuantity6Stereo audio√Microphones8 mSound pickup distance8 mSound pickup angle180° forwardQuantity12Frequency domain100 Hz to 20 kHz				
Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio ✓ Microphones Sound pickup distance Sound pickup angle Quantity 12 Frequency domain 100 Hz to 20 kHz	Zoom	2 x digital zoom		
Frequency domain 100 Hz to 20 kHz Quantity 6 Stereo audio ✓ Microphones Sound pickup distance Sound pickup angle Quantity 12 Frequency domain 100 Hz to 20 kHz	Speakers			
Quantity6Stereo audio√MicrophonesSound pickup distance8 mSound pickup angle180° forwardQuantity12Frequency domain100 Hz to 20 kHz	-	100 Hz to 20 kHz		
Stereo audio√MicrophonesSound pickup distance8 mSound pickup angle180° forwardQuantity12Frequency domain100 Hz to 20 kHz		6		
Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Stereo audio	\checkmark		
Sound pickup distance 8 m Sound pickup angle 180° forward Quantity 12 Frequency domain 100 Hz to 20 kHz	Microphones			
Quantity 12 Frequency domain 100 Hz to 20 kHz	•	8 m		
Frequency domain 100 Hz to 20 kHz	Sound pickup angle	180° forward		
Frequency domain 100 Hz to 20 kHz	Quantity	12		
·		100 Hz to 20 kHz		
======================================	Enhanced functions	Echo cancellation, noise suppression, auto gain control, and external microphones		

Technical Specifications

Technical Specification	s-2	
Model	IdeaH	ub Pro
Screen size	65"	86"
Ports		
Video input	1 x built-in camera 1 x HDMI (4K 30 fps), 1 x HDMI (4K 30 fps, external cameras) 1 x optional OPS input (4K 30 fps)	
Video output	1 x embedded monitor 1 x HDMI (1080p 60 fps)	
Audio input	1 x built-in microphone array 1 x 3.5 mm LINE IN 1 x HD-AI 1 x OPS input (optional) 1 x HDMI (audio input, conflicted with OPS)	
Audio output	1 x built-in speaker 1 x 3.5 mm LINE OUT 1 x HDMI (audio output)	
Other ports	2 x USB Type-A 1 x USB Type-B 1 x RJ45 (10/100/1000 Mbit/s LAN) 1 x RJ45 (for Touch)	
Wi-Fi	2.4 GHz and 5 GHz	
Electricity Supply Requiren	nents	
Rated operating voltage	100 V to 240 V AC	
Operating frequency	50 Hz to 60 Hz	
Max. power	350 W	450 W
Environment Requirements	5	
Noise	≤ 46 dl	BA SPL
Altitude	< 5000 m	
Temperature	IdeaHub: 0°C to 40°C, Touch: 0°C to 35°C (operating state) –20°C to + 60°C (non-operating state)	
Relative humidity	10% to 90% (operating state) 5% to 95% (non-operating state)	
Recommended illuminance	> 200 lux	
Min. illuminance	7 lux	
Certification		
Regulatory compliance	CCC, CE (RoHS, REACH, and WEEE), VCCI, Network Access License of MIIT, and Radio Type Approval Certification	
Dimensions and Weight		
Package dimensions (H x W x D)	1114 x 1720 x 246 mm	1404 x 2236 x 356 mm
Product dimensions (H x W x D)	931.1 x 1492.5 x 71mm	1195.1 x 1963.8 x 95 mm
Gross weight	63 kg	110 kg
Net weight	50 kg	90 kg
	-	-

Note: The dimensions and weight may vary with configuration, manufacturing process, and measurement method.

Technical Specifications

Technical Specification	าร-3		
Model		IdeaHub Pro	
Screen size	65"	86"	
Communications Protocols	5		
Multimedia framework protocols	ITU-T H.323 and IETF SIP		
Audio codec protocols	AAC-LD mono/stereo, G.	711A, G.711U, G.722, G.729A, G.722.1C, and OPUS	
Video codec protocols	H.265, H	.264 SVC, H.264 HP, and H.264 BP	
Network transmission protocols	TCP/IP, RTP, RTCP, DHCP, DNS, SMTP, SNMP, SNTP, Telnet, SSH, HTTP, HTTPS, and TR-069		
Dual-stream protocols		ITU-T H.239 and BFCP	
Other communications protocols	H.225, H.235, H.241, F	H.245, H.281, H.460, RFC2833, LDAP, and LDAPS	
Wi-Fi standards	IEEE 802.11 a/b/g/n/ac/v	w, IEEE 802.1x, WPA2, Wi-Fi AP, and station mode	
IP protocols		IPv4 and IPv6 dual stack	
Conference Specifications			
Conferencing mode		Native conferencing	
Codec	H.265 1080p hardware codec		
Video resolutions Content resolutions	Min. H.264 bandwidth 1080p 30 fps 720p 60 fps 720p 30 fps Min. H.265 bandwidth 1080p 30 fps 720p 60 fps 720p 30 fps 10put: 1920 x 1080 24/25/30/50/60 1920 x 1200 60 fps 3840 x 2160 25/30/50/60 fps Output: 1920 x 1080 3840 x 2160	•	
Dual-stream resolutions	Codec resolutions: 1080p (1920 x 1080) 1920 x 1200 4K (3840 x 2160) Video conferencing: 1080p 30 fps + 1080p 30fps		
	1080p 30 fps + 4K 8 fps Data conferencing: 1080p 30 fps 4K 8 fps		
Al	Speaker tracking, acoustic baffle, and Auto-Framing		
Languages	Simplified Chinese, traditional Chinese, English, Spanish (Europe), French, Russian, Japanese, German, and Portuguese (Brazil)		
Security	Embedded encryption chip that supports H.235, STARTTLS, TLS, SRTP encryption, and Chinese cryptographic algorithms		

Subscription Information

Product Name	Appearance	Remarks
HUAWEI IdeaHub Pro 65 HUAWEI IdeaHub Pro 86	2464-1583	<u>-</u>
Mount	Appearance	Remarks
65 inch Rolling Stand		Optional for 65" model
86 inch Rolling Stand		Optional for 86" model
Wall Mount Bracket		Included for 86" model Optional for 65" model
Optional Accessories	Appearance	Remarks
IdeaShare Key		-
CloudLink Touch		_

Learn More>>>

Intelligent Collaboration Website



Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without the prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI, HUAWEI, and Ware trademarks or trade names of Huawei Technologies Co., Ltd. All other trademarks, product names, service names, and company names mentioned in this document are the property of their respective holders.

Disclaime

The technical specifications described in this document include but are not limited to parameters and performance indicators and vary depending on the actual release. This document does not constitute a warranty of any kind, expressed or implied. Huawei may update relevant information from time to time. Huawei reserves the right to update or correct the information about related products or solutions. Updates are described in detail in the latest release notes or introduction.

Huawei Technologies Co., Ltd. Huawei Industrial Base, Bantian, Longgang Tel: +86 755 28780808 Postal code: 518129

Updated: December 2020